3. Centering the Numbering Cylinder

A system may require minor adjustments before first use to ensure that the drum key in the machine aligns properly with the drum key in the cylinder.

1. Line up the white dot on the Indicator knob with the Arrow on the cylinder plate. This ensures the cylinder is locked in the proper position.

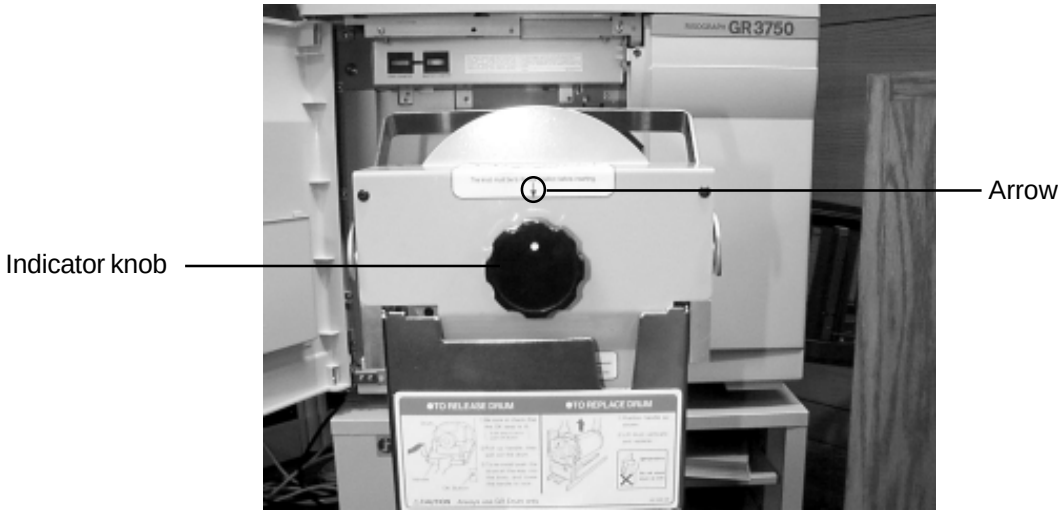

2. Slowly slide the Numbering cylinder into the Risograph until its back end comes just flush with the edge of the Risograph cylinder opening.

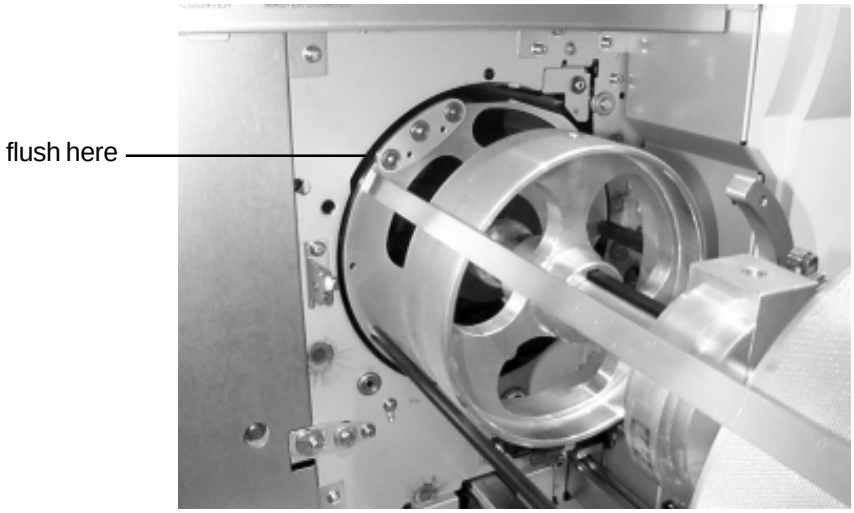

3. Use an allen wrench to adjust the Centering screws located on the back of the cylinder's front panel (left and right).

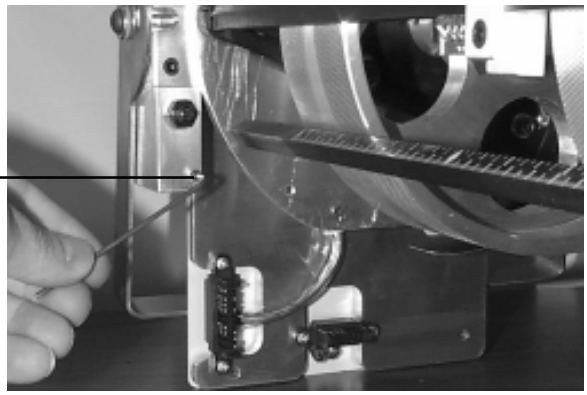

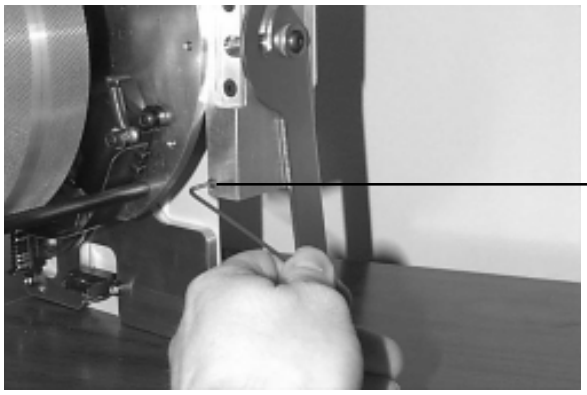

4. Once it is centered, gently slide the unit all the way into the Risograph and lower the handle.

5. Close the Risograph door and produce a test print to ensure the system is properly positioned.